


# Hybrid nDVR

Application Software  
ACTi Hybrid nDVR - nDVR + IP Edition

## Preliminary

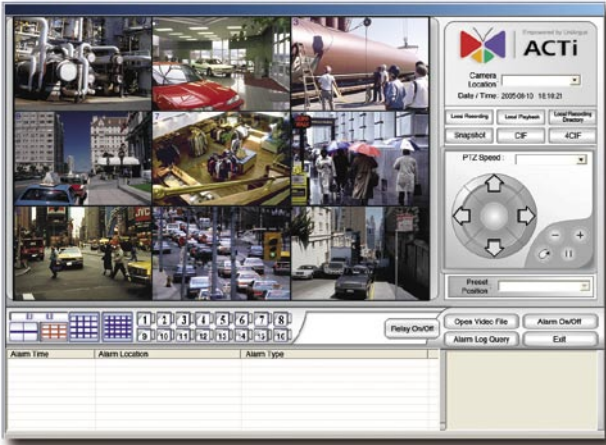

- Hybrid solution to support analog and IP cameras
- Manage up to 25 cameras (16 analog + 9 IP)
- Supports 1, 4, 9, 16, 25 preview windows
- Client-server infrastructure
- eMap management
- Advanced remote monitoring
- Scalable to enterprise-level manageability

### ► All-in-one surveillance solution

Traditional surveillance systems that include independent video monitoring, anti-intrusion, fire alarm, and entrance control systems, are subject to poor performance and high maintenance costs. ACTi Hybrid nDVR breaks all these limitations and provides a seamless integration for diverse surveillance devices.

### ► Advanced remote monitoring

ACTi Hybrid nDVR gives you full access to your cameras and security devices through web-based user interface. You can control PTZ (Pan/Tilt/Zoom) cameras and security devices such as alarms, lights and door locks etc. through the internet. Motion detected intrusion and alarm notifications to emails and phones are also available.

### ► Hybrid solution to support analog and digital cameras

ACTi Hybrid nDVR supports both analog cameras and digital cameras. The hybrid solution provides a migration path to leverage your existing investment as well as to upgrade it to a new generation IP surveillance solution.

### ► Scalable to Enterprise-level manageability

ACTi Hybrid nDVR works independently. Multiple ACTi Hybrid nDVR's can be integrated through ACTi Hybrid nDVR Server system. With the system's cascaded management technology, you have the full flexibility to fulfill your strategic surveillance requirements by integrating multiple stations supporting the number of surveillance devices that you need.



## PRODUCT SPECIFICATION

System Infrastructure		
Server-client	1 server + unlimited clients	
Video Input		
Analog Camera	16 channels	
IP Camera	Maximum 9 channels	
Video Processing		
Compression	MPEG-4 ASP hardware compression	
Resolution	Full D1 720 x 480 in NTSC Full D1 720 x 576 in PAL	
Max Frame Rate	30fps at Full D1 resolution(NTSC) 25fps at Full D1 resolution(PAL)	
Frame Rate	Preview <ul style="list-style-type: none"> <li>• 30/25 fps at full screen and 4 split screen</li> <li>• 1fps at 9, 16, 25 split screen</li> </ul>	
	Recording	30/25 fps for each channel
	Playback	30/25 fps for each channel
Administration Management		
User Management	Add user	
	Group configuration	
eMap	Add area	
	eMap uploading	
Camera Setting	Basic setting	
	Image quality	
	Image rotation	
	Motion detection schedule recording	
	Alarm breach (alarm chain reaction)	
	Allocate to eMap	
	Edit video gateway	
Edit IP camera		
System Management	E-Mail notification	
	SMS notification	
	DNS setting	
	Schedule recording	
	Repeat recording	
	Camera patrol	
	System breach (alarm chain reaction)	
Monitoring		
Preview Window	1, 4, 9, 16, 25	
PTZ Control	Zoom	
	Auto pan/tilt	
	Auto patrol	
Local Recording Management	Preset position	
	Local recording	
Alarm Management	Local playback	
	Alarm log	
	Alarm query	
	Alarm playback	
	Alarm On/Off	
Server Playback	eMap popup	
Relay	Yes	
IE Browsing	On/Off	
	Yes	